

RUGGED CONSTRUCTION. SOLID PERFORMANCE



SUBMERSIBLE MOTORS - **50 Hz**



Products from an ISO 9001 COMPANY

INDEX

SUBMERSIBLE MOTORS - ECO & ELEGANT Series (50Hz)

Model Designation & Shaft Extension Height.....	2
---	---

SUBMERSIBLE MOTORS - ECO Series (50Hz)

Construction, Product Applications & Characteristics	3
Construction Features.....	4
Cross Sectional Drawing & Mounting Dimensions.....	5-8
Technical Data & Capacitor Details	9-10
Electrical Data	11-13
Dimensions & Weights	14-16

SUBMERSIBLE MOTORS - ELEGANT Series (50Hz)

Construction, Product Applications & Characteristics	17
Cross Sectional Drawing & Mounting Dimensions.....	18
Construction Features, Technical Data & Capacitor Details.....	19
Electrical Data	20
Dimensions & Weights	21


CHARTS

Cable Selection Chart.....	22-23
Notes	24

GENERAL DATA

BOREHOLE SUBMERSIBLE MOTORS > ECO & ELEGANT SERIES

Model Designation > BOREHOLE SUBMERSIBLE MOTORS

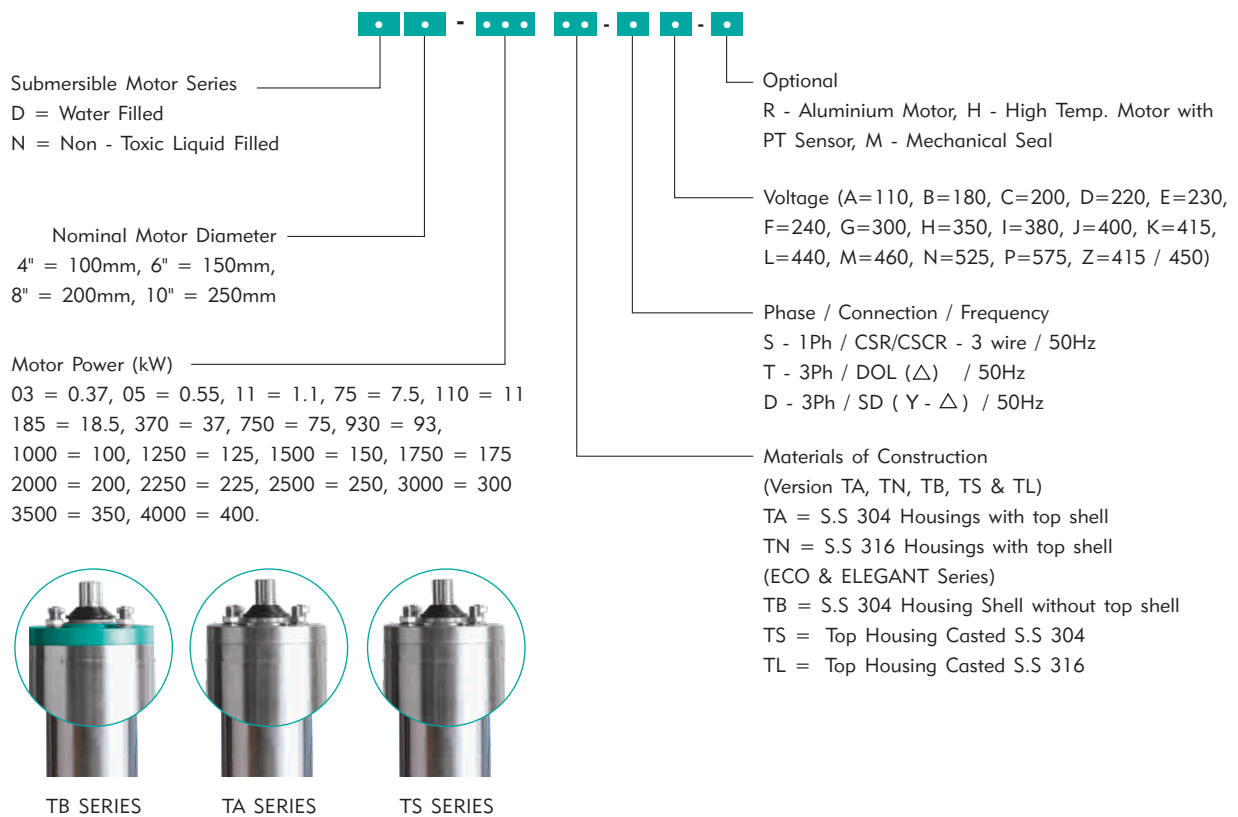

Shaft Extension Height & Free End Play

S.No.	Description	Position	4"	6"	8"	10"
01	Lift Condition	Maximum	1.55	2.93	4.05	4.05
		Minimum	1.54	2.91	4.40	4.40
02	Rest Condition	Maximum	1.508	2.875	4.0	4.0
		Minimum	1.498	2.860	3.99	3.99

* All dimensions are in inches

During every servicing, the free end play must be checked with the above values. If the shaft extension height measured differs, the motor thrust bearing could possibly be damaged and should be replaced.

The company reserves the right to modify the technical specifications & illustrations without prior notice.

GENERAL DATA

BOREHOLE SUBMERSIBLE MOTORS > ECO SERIES

Construction

Tormac ECO series submersible motors are ingeniously designed and developed employing latest engineering softwares, high-tech machinery & tools with the complement of cutting edge technology for hardwearing and maintenance free operations and to ensure relentless performance.

The electrical conditions such as voltage, frequency and the operating conditions are taken into account in designing the winding and cooling system. The profound experience of the company facilitate to meet out the demanding technological challenges across the world. Tried and trusted indigenously improved design, combined with the most optimized efficiency in electromagnetic design exceptionally ensures trouble free performance. The integrated and most modern quality assurance systems used at every stage of production and flawless workmanship lead to sustained and consistent operation.

Tormac ECO series motors are squirrel cage, water filled and water cooled rewindable type. The winding of these two pole motors are made of a special water proof wire of pure electrolytic copper insulated with synthetic film or thermoplastic material. All single phase motors are fitted with thermal protector to avoid winding burnouts. The stator shell, housings shell & motor base are made of fabricated S.S 304/316 which prevents the motor from corrosion.

These motors are pre-filled with environmentally safe deionised water which acts as a lubricant & coolant. The prefilled water level to be ensured at the time of installation. A uniquely designed thrust bearing with high thrust capacity and good quality shaft seals are used to enhance the strength & durability. All single phase motors are supplied with suitable control boxes. The main advantage of rewindable motor construction is making the repair and rewinding easier and hassle free at field levels. All Tormac motors are produced in accordance with ISO 9001 standards and mounting dimensions with NEMA standard.



Applications

Public & Industrial Water Supply
Sumps / Reservoirs
Fire Fighting Equipments
Pressure Boosting Systems
Irrigation & Fountains
Water Treatment Plants
High Rise Buildings
Agricultural Lands
Stock Breeding, Laboratories
Sprinkler Systems and Mining

Characteristics

Highly reliable, tried & tested.
High efficiency
Stainless steel stator shell, motor base & housings shell to prevent corrosion.
The high quality shaft seal and sand guard prevent ingress of liquid and sand.
Uniquely designed thrust bearing to withstand high down thrust loads.
Higher starting torque to run in tough conditions.
The shaft is designed for optimal power transmission.
End connections & shaft extension are designed according to NEMA standards.

GENERAL DATA

Construction Features > ECO SERIES - 4"

Components	Version - TA	Version - TN
Seal Housing	Cast Iron with S.S.304 Shell	Cast Iron with S.S.316 Shell
Upper & Lower Support	Cast Iron	Cast Iron
Shaft Seal	NBR	NBR
Wound Stator Shell	S.S. 304	S.S. 316
Spline Shaft	417-4Ph	417-4Ph
Rotor Shaft	EN-8/EN-9	EN-8/EN-9
Radial Bearings	Graphite Carbon	Graphite Carbon
Thrust Segment Carrier/Segments	SG Iron / S.S. 420	SG Iron / S.S. 420
Thrust Disc	Graphite Carbon	Graphite Carbon
Pressure Equalizing Diaphragm	HNBR	HNBR
Diaphragm Cover	S.S. 304	S.S. 316

Construction Features > ECO SERIES - 6"


Components	Version		
	TA / TS	TB	TN / TL
Seal Housing	S.S. 304 / Casted S.S. 304	Cast Iron	S.S. 316 / Casted S.S. 316
Upper & Lower Support	S.S. 304	Cast Iron	S.S. 316
Shaft Seal	NBR	Nitrile Rubber	NBR
Wounded Stator Shell	S.S. 304	SS 304	S.S. 316
Spline Shaft	S.S.17-4 Ph	SS 431 / SS 17 - 4 Ph	S.S. 417-17Ph
Rotor Shaft	EN-8 (or) EN-9	SS 431 / EN - 8	EN-8 (or) EN-9
Radial Bearings	Graphite Carbon	Graphite Carbon	Graphite Carbon
Thrust Segment Carrier/Segments	SG Iron (or) S.S. 420	SS 420	SG Iron (or) S.S. 420
Thrust Disc	Graphite Carbon	Graphite Carbon	Graphite Carbon
Pressure Equalizing Diaphragm	EPDM	High Nitrile Rubber	EPDM
Diaphragm Cover	S.S. 304	SS 304	S.S. 316

Construction Features > ECO SERIES - 8" & 10"


Components	8"			10"
	Version - TB	Version - TS	Version - TL	Version - TB
Seal Housing	Cast Iron	Casted S.S. 304	Casted S.S. 316	Cast Iron
Upper & Lower Support	Cast Iron	Casted S.S. 304	Casted S.S. 316	Cast Iron
Shaft Seal	Carbon Vs Ceramic	Carbon Vs Ceramic	Carbon Vs Ceramic	Carbon Vs Ceramic
Wounded Stator Shell	SS 304	SS 304	SS 316	SS 304
Spline Shaft	SS 410	SS 410	SS 410	SS 410
Rotor Shaft	EN-8	EN-8	EN-8	EN-8
Radial Bearings	Graphite Carbon	Graphite Carbon	Graphite Carbon	Graphite Carbon
Thrust Segment Carrier/Segments	SS 420	SS 420	SS 420	SS 420
Thrust Disc	Graphite Carbon	Graphite Carbon	Graphite Carbon	Graphite Carbon
Pressure Equalizing Diaphragm	High Nitrile Rubber	High Nitrile Rubber	High Nitrile Rubber	High Nitrile Rubber
Diaphragm Cover	SS 304	SS 304	SS 316	SS 304

ECO SERIES (4")

CROSS SECTIONAL DRAWING

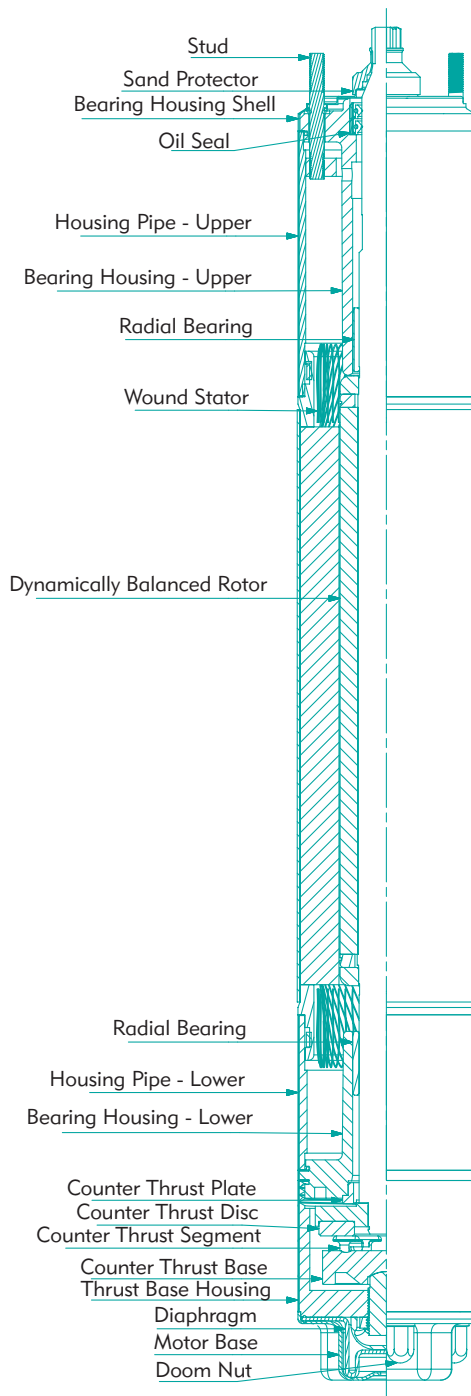

MOUNTING DIMENSIONS

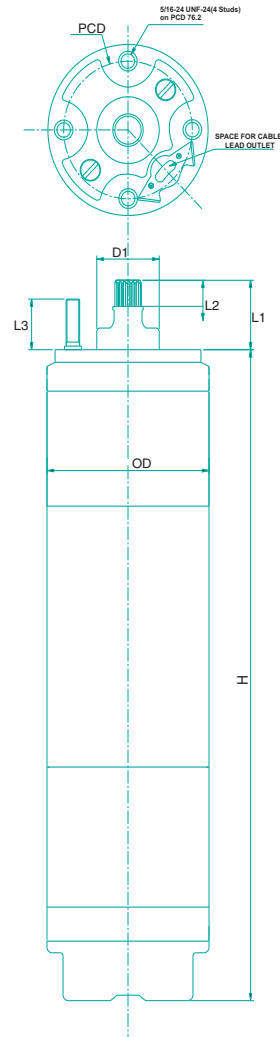


Spline Data-14 teeth, 24/48 Pitch, 30 Degree pressure angle,
Hator fillet root, Side fit, tolerance Class-5,
In accordance with ANSI B92-1

	Dimensions in inches						
	L1	L2	L3	L4	OD	OD1	OD2
4"	1.50	0.5	1.0	-	3.8	1.45	-


All the Mounting dimensions are in accordance with NEMA standards.

ECO SERIES (6")

CROSS SECTIONAL DRAWING

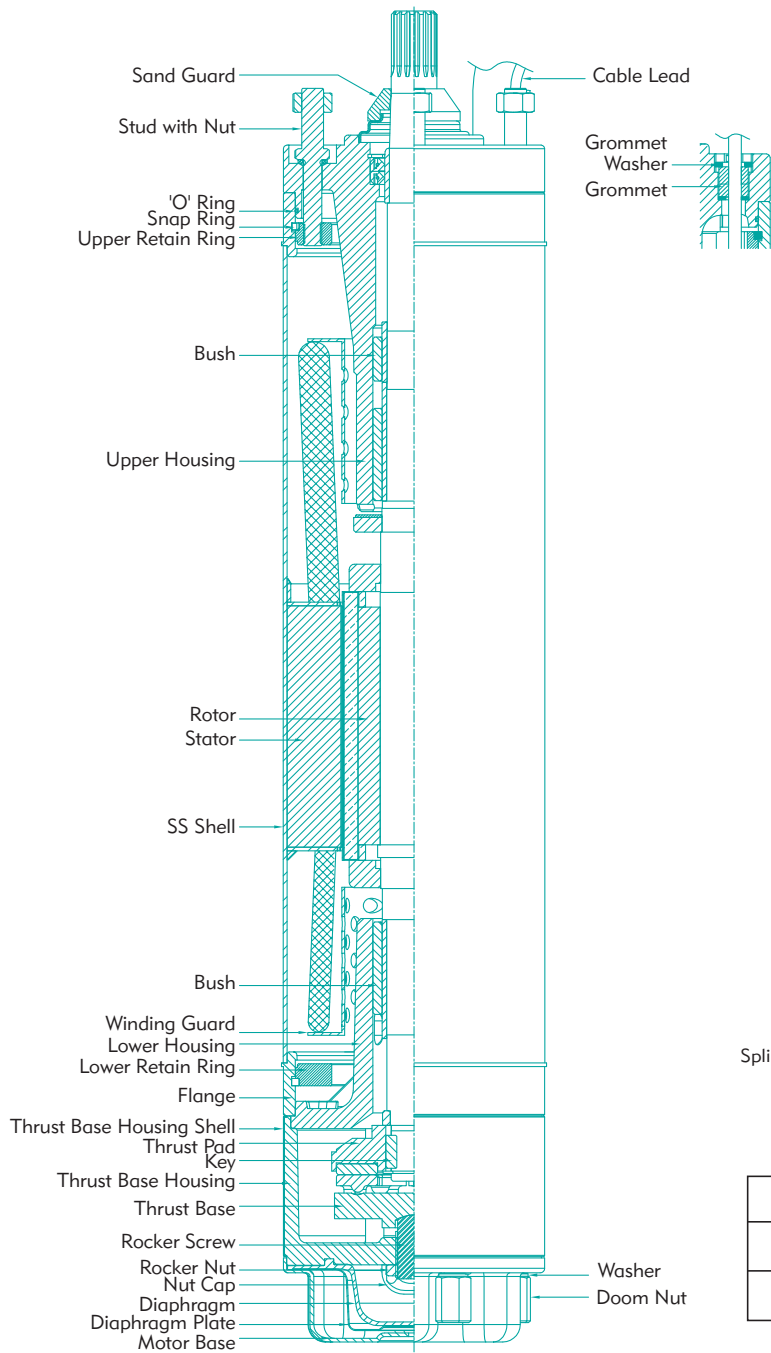

MOUNTING DIMENSIONS

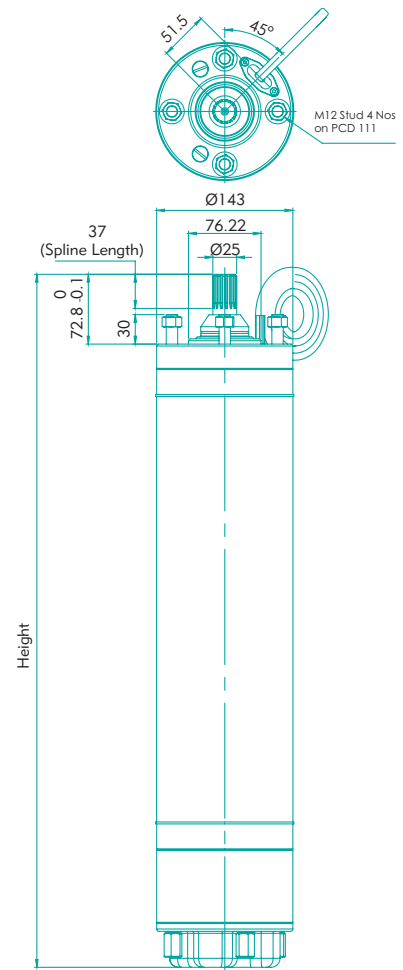

Spline Data-15 teeth, 16/32 Pitch, 30 Degree pressure angle, Hator fillet root, Side fit, tolerance Class-5, In accordance with ANSI B92-1

	Dimensions in inches					
	L1	L2	L3	OD	DI	D2
6"	2.87	1.45	0.19	5.6	0.99	30



The company reserves the right to modify the technical specifications & illustrations without prior notice.

The company reserves the right to modify the technical specifications & illustrations without prior notice.

ECO SERIES (8")

CROSS SECTIONAL DRAWING

MOUNTING DIMENSIONS

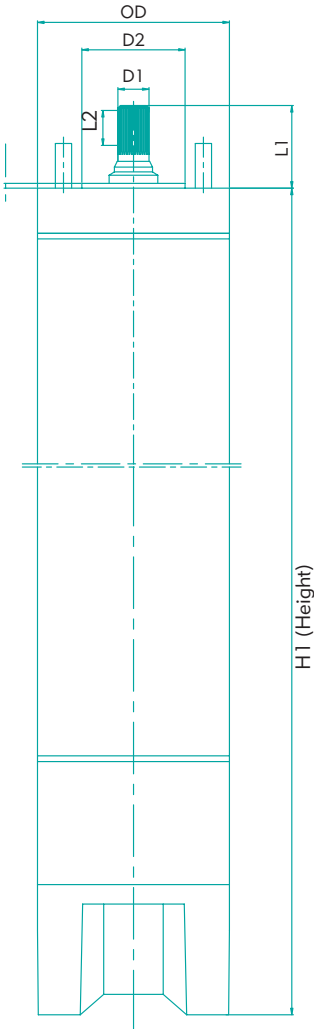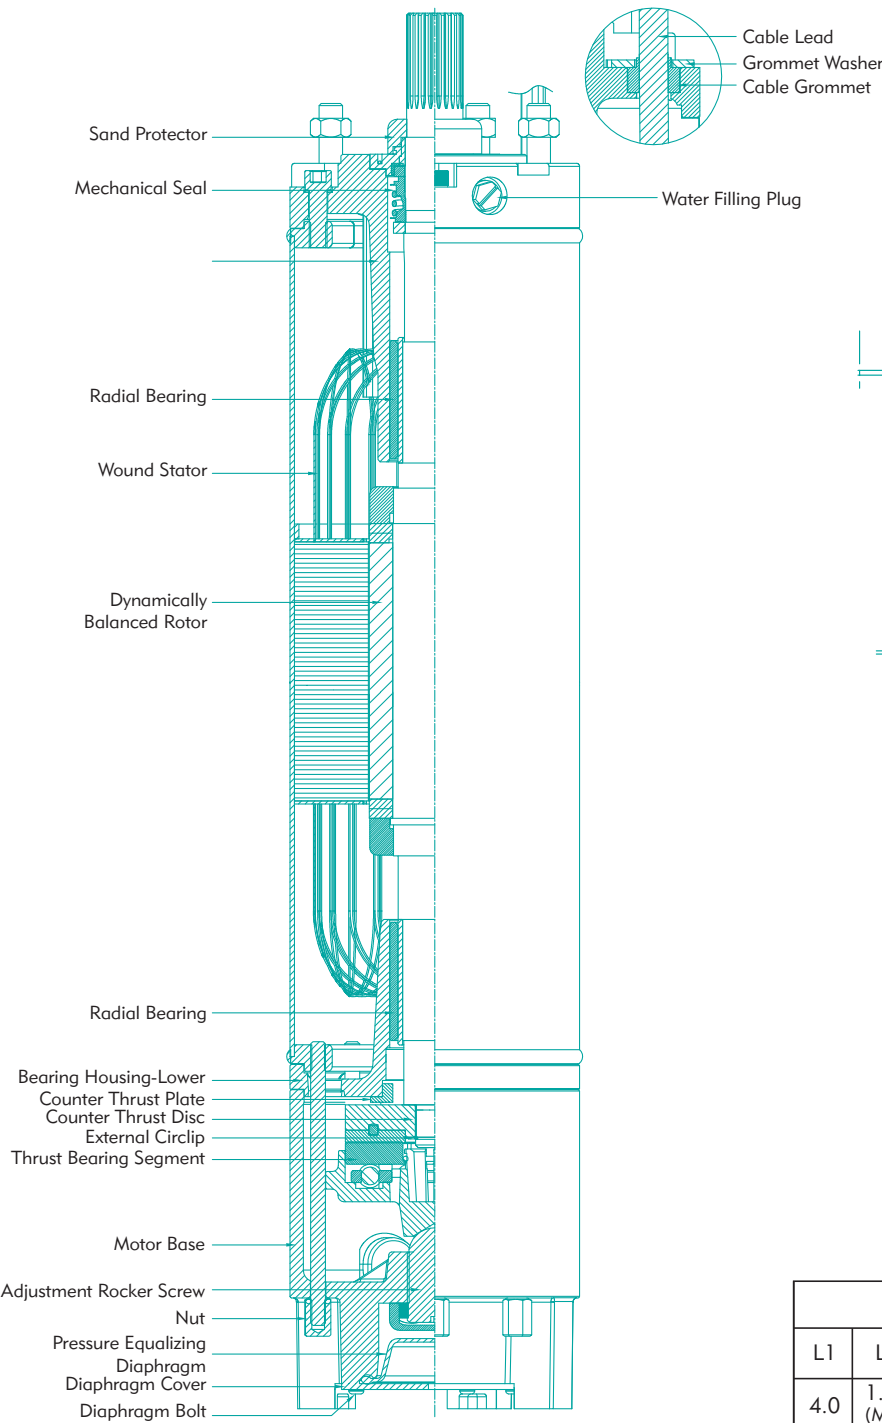


Dimensions in inches					
L1	L2	L3	OD	D1	D2
4.0	1.68 (Min)	0.25	9.3	1.50	5.0


The company reserves the right to modify the technical specifications & illustrations without prior notice.

ECO SERIES (10")

CROSS SECTIONAL DRAWING

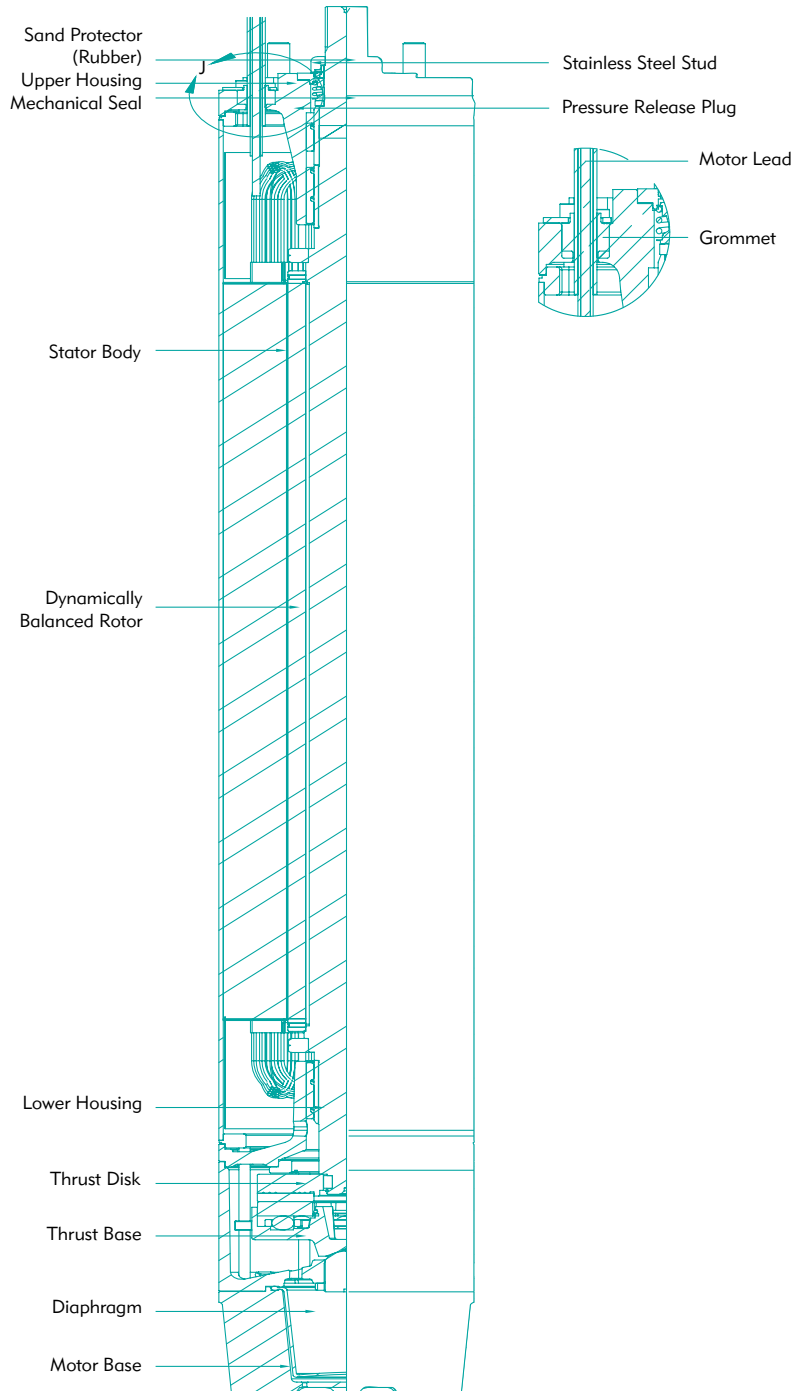

MOUNTING DIMENSIONS

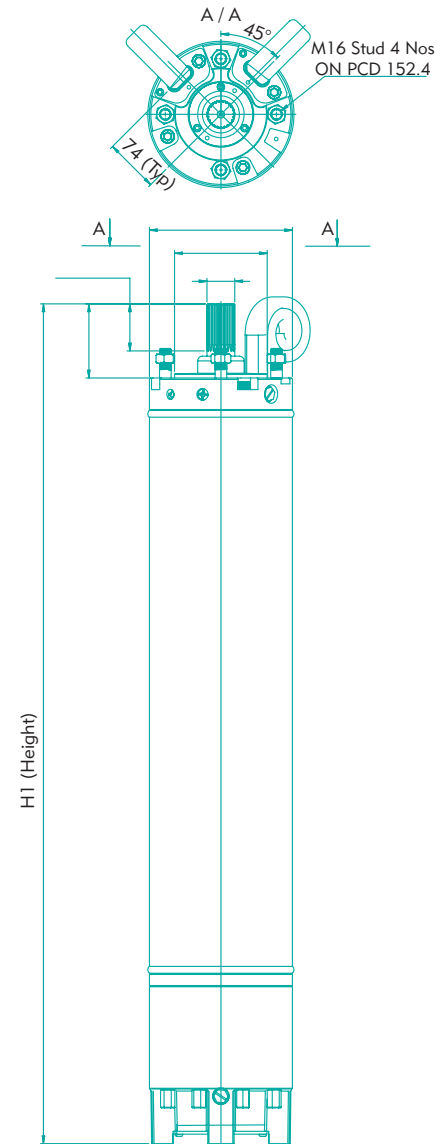

Spline Data-23 teeth, 16/32 Pitch, 30 Degree pressure angle, Hator fillet root, Side fit, tolerance Class-5, In accordance with ANSI B92-1

Dimensions in inches					
L1	L2	L3	OD	D1	D2
4.0	2.36	0.25	7.3/7.6	1.50	5.0

All the Mounting dimensions are in accordance with NEMA standards.

The company reserves the right to modify the technical specifications & illustrations without prior notice.

TECHNICAL DATA

ECO SERIES > 50Hz

Specifications	Nominal Diameter (4")	Nominal Diameter (6")
Rated Output & Voltage	0.37 to 2.2kW - 1Ph, 230V, 3Wire 0.37 to 7.5kW - 3Ph, 380/415V, (Δ)	4 to 45kW - 3Ph, 380/415V
Rated Speed	2900 rpm	2900 rpm
Voltage Tolerance	-15% + 6%	-15% + 6%
Protection	IP 58	IP 58 / IP 68
Rotation Sequence	CCW - 1Ph CW, CCW - 3Ph	CW, CCW - 3Ph
Outer Diameter	98mm	143mm
Duty	S1 (Continuous)	S1 (Continuous)
Linear flow	0.15m/sec	0.15m/sec
Liquid Temperature	38°C max.	38°C max.
Switching Frequency	20 Times / hour	20 Times / hour
Thrust load	0.37 to 1.5kW - 3000N/650lbs 2.2 to 7.5kW - 6500N/1500lbs	4 to 22kW - 15500N/3000lbs 26 to 45kW - 27500N/6000lbs
Mounting Dimensions	NEMA Standard	NEMA Standard
Starting Method	1 Ph - CSCR 3 Ph - DOL	4 to 45kW - DOL 5.5 to 45kW - SD
Motor Lead out type	3/4 core Rubber Insulated Flat Cable leads, internally connected with the windings.	3/4 core Rubber Insulated Flat Cable leads, internally Connected with the windings
Class of Insulation	Y	Y
Thermal Protection	-	High Temperature Motors for 70°C / 90°C can be supplied with PT Sensor & PE2 / XLPE / PA Winding

Capacitor Details for 4" Single Phase 230V Submersible Motors (CSCR)

kW	Motor Type	Running Capacitor (μfd)	Starting Capacitor (μfd)
0.37	D4 - 03 TA-SE	30	60 / 80
0.55	D4 - 05 TA-SE	40	80 / 100
0.75	D4 - 07 TA-SE	30+25	100 / 120
1.1	D4 - 11 TA-SE	36+40	120 / 150
1.5	D4 - 15 TA-SE	40+45	200 / 250
2.2	D4 - 22 TA-SE	50+50	200 / 250

The company reserves the right to modify the technical specifications & illustrations without prior notice.

TECHNICAL DATA

ECO SERIES > 50Hz

Specifications	Nominal Diameter (8")	Nominal Diameter (10")
Rated Output & Voltage	37 to 93kW - 380/415V, 3Ph, (WYE-DELTA)	81 to 220kW - 380/415V, 3Ph, (WYE-DELTA)
Rated Speed	2900 rpm	2900 rpm
Voltage Tolerance	-15% + 6%	-15% + 6%
Protection	IP 58 / IP 68	IP 68
Rotation Sequence	CW, CCW - 3Ph	CW, CCW - 3Ph
Outer Diameter	196mm	81 to 185 kW - 236mm 220 kW - 240mm
Duty	S1 (Continuous)	S1 (Continuous)
Linear flow	0.16m/sec	0.16m/sec
Liquid Temperature	38°C max.	38°C max.
Switching Frequency	15 Times / hour	10 Times / hour
Thrust load	45500N/10000lbs	60000N/13500lbs
Mounting Dimensions	NEMA Standard	NEMA Standard / International
Starting Method	37 to 93kW - DOL & SD	81 to 220kW - DOL & SD
Motor Lead out type	3/4 core Rubber Insulated Flat Cable leads, internally Connected with the windings	3/4 core Rubber Insulated Flat Cable leads, internally Connected with the windings
Class of Insulation	Y	Y
Thermal Protection	High Temperature Motors for 70°C / 90°C can be supplied with PT Sensor & PE2 / XLPE / PA Winding	High Temperature Motors for 70°C / 90°C can be supplied with PT Sensor & PE2 / XLPE / PA Winding

ELECTRICAL DATA

ECO SERIES > 50Hz

4", Single phase, 230V, Submersible Motors

Motor Type*	kW	HP	Current (A)	Locked Rotor Amps	Full Load		Thrust Capacity (N)	Starting Torque (Nm)	Rated Torque (Nm)
					Eff%	Phase Angle			
D4-03 TA-SE	0.37	0.5	5	16	39	0.89	3000	2	1.2
D4-05 TA-SE	0.55	0.75	6	21	52	0.90	3000	2.9	1.8
D4-07 TA-SE	0.75	1	7.5	26	54	0.90	3000	4.1	2.5
D4-11 TA-SE	1.1	1.5	10	40	57	0.95	3000	6.1	3.7
D4-15 TA-SE	1.5	2	13	48	60	0.95	3000	8.3	4.9
D4-22 TA-SE	2.2	3	16.5	66	62	0.95	6500	13.3	7.4

4", Three phase, 380 - 415V / WYE-DELTA, Submersible Motors

Motor Type*	kW	HP	Current (A)	Locked Rotor Amps	Full Load		Thrust Capacity (N)	Starting Torque (Nm)	Rated Torque (Nm)
					Eff%	Phase Angle			
D4-03 TA-TK	0.37	0.5	1.8	5	48	0.75	3000	2.2	1
D4-05 TA-TK	0.55	0.75	2.3	7	57	0.75	3000	3.4	1.9
D4-07 TA-TK	0.75	1	2.8	9	64	0.75	3000	4.5	2.5
D4-11 TA-TK	1.1	1.5	3.8	15	67	0.76	3000	6.7	3.7
D4-15 TA-TK	1.5	2	4.6	19	69	0.79	3000	9	5
D4-22 TA-TK	2.2	3	7	32	70	0.73	6500	14.1	7.5
D4-30 TA-TK	3	4	9	42	72	0.72	6500	19	10
D4-37 TA-TK	3.7	5	10	44	71	0.76	6500	22	12.4
D4-40 TA-TK	4	5.5	10.3	47	69	0.72	6500	23	12.4
D4-55 TA-TK	5.5	7.5	14	71	70	0.74	6500	33.7	18.7
D4-75 TA-TK	7.5	10	18.5	93	73	0.74	6500	45.2	25.1

* For AISI 316 models replace TA with TN.

ELECTRICAL DATA

ECO SERIES > 50Hz

6", Three phase, 415V / WYE-DELTA, Submersible Motors (TA SERIES)

Motor Type*	kW	HP	Current (A)	Locked Rotor Amps	Full Load		Thrust Capacity (N)	Starting Torque (Nm)	Rated Torque (Nm)
					Eff%	Phase Angle			
D6-40 TA-TK	4	5.5	10.8	43	76	0.70	15500	20	14
D6-45 TA-TK	4.5	6	12.0	48	76	0.75	15500	21	15
D6-55 TA-TK	5.5	7.5	13.5	52	78	0.77	15500	24	18
D6-75 TA-TK	7.5	10	18.5	70	82	0.75	15500	27	25
D6-93 TA-TK	9.3	12.5	21	84	82	0.79	15500	35	31
D6-110 TA-TK	11	15	25	102	82	0.80	15500	43	37
D6-130 TA-TK	13	17.5	29.5	118	83	0.80	15500	51	43
D6-150 TA-TK	15	20	33	148	83	0.81	15500	62	49
D6-185 TA-TK	18.5	25	42.5	188	83	0.81	15500	98	61
D6-220 TA-TK	22	30	49.2	225	83	0.81	15500	118	74
D6-260 TA-TK	26	35	56.5	270	83	0.82	27500	138	86
D6-300 TA-TK	30	40	67.2	355	83	0.82	27500	196	98
D6-370 TA-TK	37	50	83	420	82	0.83	27500	245	123
D6-450 TA-TK	45	60	93	465	82	0.83	27500	396	151

6", Three phase, 415V / WYE-DELTA, Submersible Motors (TB SERIES)

Motor Type*	kW	HP	Current (A)	Locked Rotor Amps	Full Load		Thrust Capacity (N)	Starting Torque (Nm)	Rated Torque (Nm)
					Eff%	Phase Angle			
D6-40 TB-TK	4	5.5	10.8	43	76	0.70	15500	20	14
D6-45 TB-TK	4.5	6	12.0	48	76	0.75	15500	21	15
D6-55 TB-TK	5.5	7.5	13.5	52	78	0.77	15500	24	18
D6-75 TB-TK	7.5	10	18.5	70	82	0.75	15500	27	25
D6-93 TB-TK	9.3	12.5	21	84	82	0.79	15500	35	31
D6-110 TB-TK	11	15	25	102	82	0.80	15500	43	37
D6-130 TB-TK	13	17.5	29.5	118	83	0.80	15500	51	43
D6-150 TB-TK	15	20	33	148	83	0.81	15500	62	49
D6-185 TB-TK	18.5	25	42.5	188	83	0.81	15500	98	61
D6-220 TB-TK	22	30	49.2	225	83	0.81	15500	118	74
D6-260 TB-TK	26	35	56.5	270	83	0.82	27500	138	86
D6-300 TB-TK	30	40	67.2	355	83	0.82	27500	196	98
D6-370 TB-TK	37	50	83	420	82	0.83	27500	245	123
D6-450 TB-TK	45	60	93	465	82	0.83	27500	396	151

* The penultimate digit of the model identification "T" denotes DOL and which will be replaced with "D" in case of 3 phase SD Motors

* For AISI 316 models replace TA with TN.

* For Casted AISI 304 models replace TA with TS.

* For Casted AISI 316 models replace TA with TL.

ELECTRICAL DATA

ECO SERIES > 50Hz

8", Three phase, 415V / WYE-DELTA, Submersible Motors

Motor Type*	kW	HP	Current (A)	Locked Rotor Amps	Full Load		Thrust Capacity (N)	Starting Torque (Nm)	Rated Torque (Nm)
					Eff%	Phase Angle			
D8-370 TB-TK	37	50	80	400	86	0.84	45500	200	122
D8-450 TB-TK	45	60	92	520	85	0.84	45500	268	149
D8-550 TB-TK	55	75	112	660	87	0.84	45500	370	180
D8-630 TB-TK	63	85	126	720	88	0.86	45500	410	206
D8-750 TB-TK	75	100	151	930	89	0.86	45500	520	246
D8-930 TB-TK	93	125	188	1250	88	0.86	45500	680	306

* The penultimate digit of the model identification "T" denotes DOL and which will be replaced with "D" in case of 3 phase SD Motors

* For Casted AISI 304 models replace TB with TS.

* For Casted AISI 316 models replace TB with TL.

10", Three phase, 415V / WYE-DELTA, Submersible Motors

Motor Type*	kW	HP	Current (A)	Locked Rotor Amps	Full Load		Thrust Capacity (N)
					Eff%	Phase Angle	
D10-750 TB-TK	75	100	150	1500	86	0.86	60000
D10-810 TB-TK	81	110	166	1600	86	0.87	60000
D10-930 TB-TK	93	125	181	1810	87	0.90	60000
D10-1100 TB-TK	110	150	220	2200	87	0.90	60000
D10-1300 TB-TK	130	175	255	2550	87	0.90	60000
D10-1500 TB-TK	150	200	290	2900	88	0.90	60000
D10-1650 TB-TK	165	225	325	3250	88	0.89	60000
D10-1850 TB-TK	185	250	355	3550	89	0.90	60000
D10-2200 TB-TK	220	300	425	4250	88	0.86	60000

* The penultimate digit of the model identification "T" denotes DOL and which will be replaced with "D" in case of 3 phase SD Motors

DIMENSIONS & WEIGHTS

ECO SERIES > 50Hz

4", Single phase, 230V, Submersible Motors

Motor Type*	kW	HP	Diameter (OD) in inches	Height (H) in inches	Nett. Wt. in lbs	Standard Motor Leads	
						(mm ²)	Length (m)
D4 - 03 TA-SE	0.37	0.5	3.8	20	29	4 x 1.5	1.5
D4 - 05 TA-SE	0.55	0.75	3.8	20	31	4 x 1.5	1.5
D4 - 07 TA-SE	0.75	1.0	3.8	22	35	4 x 1.5	1.5
D4 - 11 TA-SE	1.1	1.5	3.8	23	44	4 x 2.5	1.5
D4 - 15 TA-SE	1.5	2.0	3.8	25	64	4 x 2.5	1.5
D4 - 22 TA-SE	2.2	3.0	3.8	32	73	4 x 2.5	2

4", Three phase, 380 - 415V, Submersible Motors

Motor Type*	kW	HP	Diameter (OD) in inches	Height (H) in inches	Nett. Wt. in lbs	Standard Motor Leads	
						(mm ²)	Length (m)
D4 - 03 TA-TK	0.37	0.5	3.8	20	26	4 x 1.5	1.5
D4 - 05 TA-TK	0.55	0.75	3.8	20	29	4 x 1.5	1.5
D4 - 07 TA-TK	0.75	1.0	3.8	22	33	4 x 1.5	1.5
D4 - 11 TA-TK	1.1	1.5	3.8	23	40	4 x 1.5	1.5
D4 - 15 TA-TK	1.5	2.0	3.8	25	44	4 x 1.5	1.5
D4 - 22 TA-TK	2.2	3.0	3.8	31	34	4 x 1.5	1.5
D4 - 30 TA-TK	3.0	4.0	3.8	32	73	4 x 1.5	2
D4 - 37 TA-TK	3.7	5.0	3.8	33	77	4 x 2.5	2
D4 - 40 TA-TK	4.0	5.5	3.8	33	77	4 x 2.5	2
D4 - 55 TA-TK	5.5	7.5	3.8	38	88	4 x 4	2.5
D4 - 75 TA-TK	7.5	10	3.8	47	108	4 x 4	2.5

* For AISI 316 models replace TA with TN.

DIMENSIONS & WEIGHTS

ECO SERIES > 50Hz

6", Three phase, 415V, / WYE-DELTA Submersible Motors (TA Series)

Motor Type*	kW	HP	Diameter (OD) in inches	Height (H) in inches	Nett. Wt. in lbs	Standard Motor Leads		
						DOL (mm ²)	SD (mm ²)	Length (m)
D6 - 40 TA-TK	4.0	5.5	5.6	29	92.5	4 x 2.5	-	3
D6 - 45 TA-TK	4.5	6.0	5.6	29	96.8	4 x 2.5	-	3
D6 - 55 TA-TK	5.5	7.5	5.6	31.3	110	4 x 4	4 x 2.5	3
D6 - 75 TA-TK	7.5	10	5.6	33.3	121	4 x 4	4 x 2.5	3
D6 - 93 TA-TK	9.3	12.5	5.6	34.4	128	4 x 6	4 x 2.5	3
D6 - 110 TA-TK	11	15	5.6	36	139	4 x 6	4 x 4	3
D6 - 130 TA-TK	13	17.5	5.6	37.5	147	4 x 6	4 x 4	3
D6 - 150 TA-TK	15	20	5.6	39.1	156	4 x 10	4 x 4	3
D6 - 185 TA-TK	18.5	25	5.6	42.2	176	4 x 10	4 x 4	3.5
D6 - 220 TA-TK	22	30	5.6	45	189	4 x 10	4 x 4	3.5
D6 - 260 TA-TK	26	35	5.6	46	196	4 x 10	4 x 6	4.25
D6 - 300 TA-TK	30	40	5.6	48	207	4 x 10	4 x 6	4.25
D6 - 370 TA-TK	37	50	5.6	51	216	4 x 16	4 x 6	5.25
D6 - 450 TA-TK	45	60	5.6	54	231	4 x 16	4 x 10	5.25

6", Three phase, 415V, / WYE-DELTA Submersible Motors (TB Series)

Motor Type*	kW	HP	Diameter (OD) in inches	Height (H) in inches	Nett. Wt. in lbs	Standard Motor Leads		
						DOL (mm ²)	SD (mm ²)	Length (m)
D6 - 40 TB-TK	4.0	5.5	5.6	29	92.5	4 x 2.5	-	3
D6 - 45 TB-TK	4.5	6.0	5.6	29	96.8	4 x 2.5	-	3
D6 - 55 TB-TK	5.5	7.5	5.6	31.3	110	4 x 4	4 x 2.5	3
D6 - 75 TB-TK	7.5	10	5.6	33.3	121	4 x 4	4 x 2.5	3
D6 - 93 TB-TK	9.3	12.5	5.6	34.4	128	4 x 6	4 x 2.5	3
D6 - 110 TB-TK	11	15	5.6	36	139	4 x 6	4 x 4	3
D6 - 130 TB-TK	13	17.5	5.6	37.5	147	4 x 6	4 x 4	3
D6 - 150 TB-TK	15	20	5.6	39.1	156	4 x 10	4 x 4	3
D6 - 185 TB-TK	18.5	25	5.6	42.2	176	4 x 10	4 x 4	3.5
D6 - 220 TB-TK	22	30	5.6	45	189	4 x 10	4 x 4	3.5
D6 - 260 TB-TK	26	35	5.6	46	196	4 x 10	4 x 6	4.25
D6 - 300 TB-TK	30	40	5.6	48	207	4 x 10	4 x 6	4.25
D6 - 370 TB-TK	37	50	5.6	51	216	4 x 16	4 x 6	5.25
D6 - 450 TB-TK	45	60	5.6	54	231	4 x 16	4 x 10	5.25

* The penultimate digit of the model identification "T" denotes DOL and which will be replaced with "D" in case of 3 phase SD Motors

* For Casted AISI 304 models replace TA with TS.

* For Casted AISI 316 models replace TA with TL.

DIMENSIONS & WEIGHTS

ECO SERIES > 50Hz

8", Three phase, 415V, / WYE-DELTA Submersible Motors

Motor Type*	kW	HP	Diameter (OD) in inches	Height (H) in inches	Nett. Wt. in lbs	Standard Motor Leads		
						DOL(mm ²)	SD(mm ²)	Length (m)
D8-370 TB-TK	37	50	7.6	46	337	4 x 16	4 x 10	4
D8-450 TB-TK	45	60	7.6	48	361	4 x 16	4 x 10	4
D8-550 TB-TK	55	75	7.6	50	396	4 x 35	4 x 25	5
D8-630 TB-TK	63	85	7.6	53	425	4 x 35	4 x 25	5
D8-750 TB-TK	75	100	7.6	57.1	473	4 x 35	4 x 25	5
D8-930 TB-TK	93	125	7.6	61	517	4 x 35	4 x 35	5

* The penultimate digit of the model identification "T" denotes DOL and which will be replaced with "D" in case of 3 phase SD Motors

* For Casted AISI 304 models replace TB with TS.

* For Casted AISI 316 models replace TB with TL.

10", Three phase, 415V, / WYE-DELTA Submersible Motors

Motor Type*	kW	HP	Diameter (OD) in inches	Height (H) in inches	Nett. Wt. in lbs	Standard Motor Leads		
						DOL(mm ²)	SD(mm ²)	Length (m)
D10-750 TB-TK	75	100	9.1	48	529	4 x 25	4 x 16	4
D10-810 TB-TK	81	110	9.1	50	572	4 x 25	4 x 25	4
D10-930 TB-TK	93	125	9.1	51	603	4 x 25	4 x 25	4
D10-1100 TB-TK	110	150	9.1	57	691	4 x 25	4 x 25	4
D10-1300 TB-TK	130	175	9.1	61	755	4 x 25	4 x 25	4
D10-1500 TB-TK	150	200	9.1	69	805	4 x 35	4 x 35	4
D10-1650 TB-TK	165	225	9.1	74	900	4 x 35	4 x 35	4
D10-1850 TB-TK	185	250	9.1	78	966	4 x 35	4 x 35	4
D10-2200 TB-TK	220	300	9.1	86	1102	4 x 70	4 x 70	4

* The penultimate digit of the model identification "T" denotes DOL and which will be replaced with "D" in case of 3 phase SD Motors

GENERAL DATA

BOREHOLE SUBMERSIBLE MOTORS > ELEGANT SERIES

Construction Tormac Elegant series submersible motors are ingeniously designed and developed employing latest engineering softwares, high-tech machinery & tools with the complement of cutting edge technology for hardwearing and maintenance free operations and to ensure relentless performance.

The electrical conditions such as voltage, frequency and the operating conditions are taken into account in designing the winding and cooling system. The profound experience of the company facilitate to meet out the demanding technological challenges across the world. Tried and trusted indigenously improved design, combined with the most optimized efficiency in electromagnetic design exceptionally ensures trouble free performance. The integrated and most modern quality assurance systems used at every stage of production and flawless workmanship lead to sustained and consistent operation.

Tormac Eelegant series motors are squirrel cage, Non toxic liquid filled and liquid cooled non rewindable type. The winding of these two pole motors are made of high quality enameled copper wire. The stator shell, housings shell & motor base are made of fabricated S.S 304/316 which prevents the motor from corrosion.

These motors are pre-filled with environmentally safe edible grade oil which acts as a lubricant. A uniquely designed angular contact ball bearing to withstand high thrust capacity and good quality shaft seals are used to enhance the strength & durability. All single phase motors are supplied with suitable control boxes. All Tormac motors are produced in accordance with ISO 9001 standards and mounting dimensions with NEMA standard.



Applications


- Public & Industrial Water Supply
- Sumps / Reservoirs
- Fire Fighting Equipments
- Pressure Boosting Systems
- Irrigation & Fountains
- Water Treatment Plants
- High Rise Buildings
- Agricultural Lands
- Stock Breeding, Laboratories
- Sprinkler Systems and Mining

Characteristics


- Highly reliable, tried & tested.
- High efficiency
- Stainless steel stator shell, motor base & housings shell to prevent corrosion.
- The high quality shaft seal and sand guard prevent ingress of liquid and sand.
- Uniquely designed thrust bearing to withstand high down thrust loads.
- Higher starting torque to run in tough conditions.
- The shaft is designed for optimal power transmission.
- End connections & shaft extension are designed according to NEMA standards.

ELEGANT SERIES (4")

CROSS SECTIONAL DRAWING

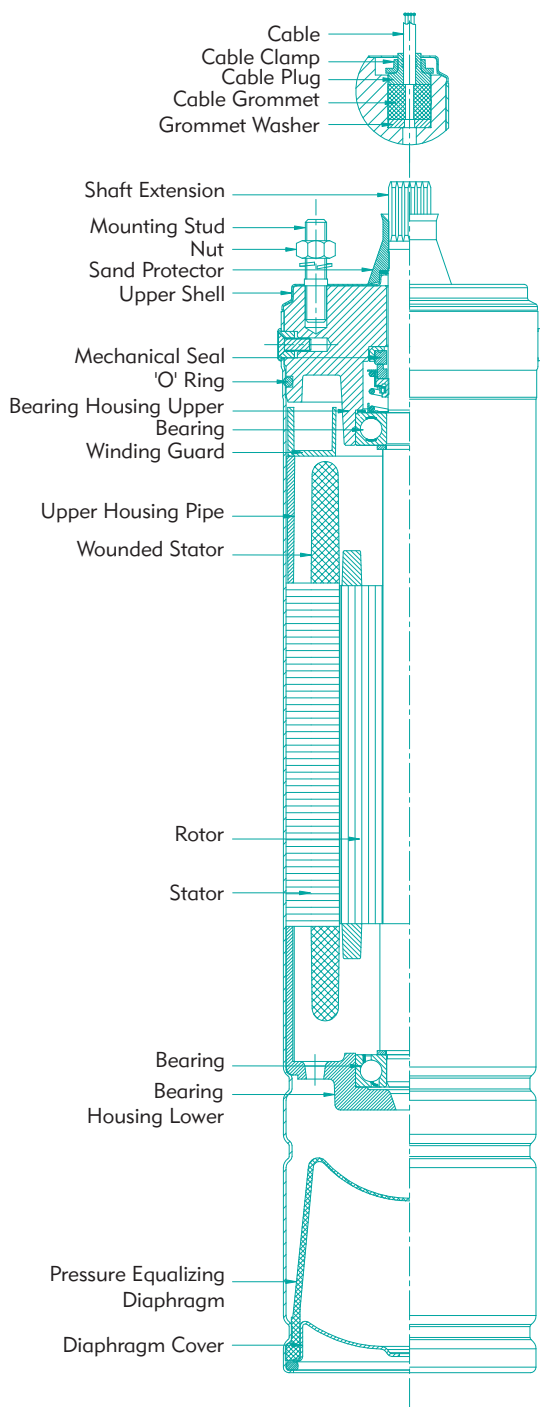

MOUNTING DIMENSIONS

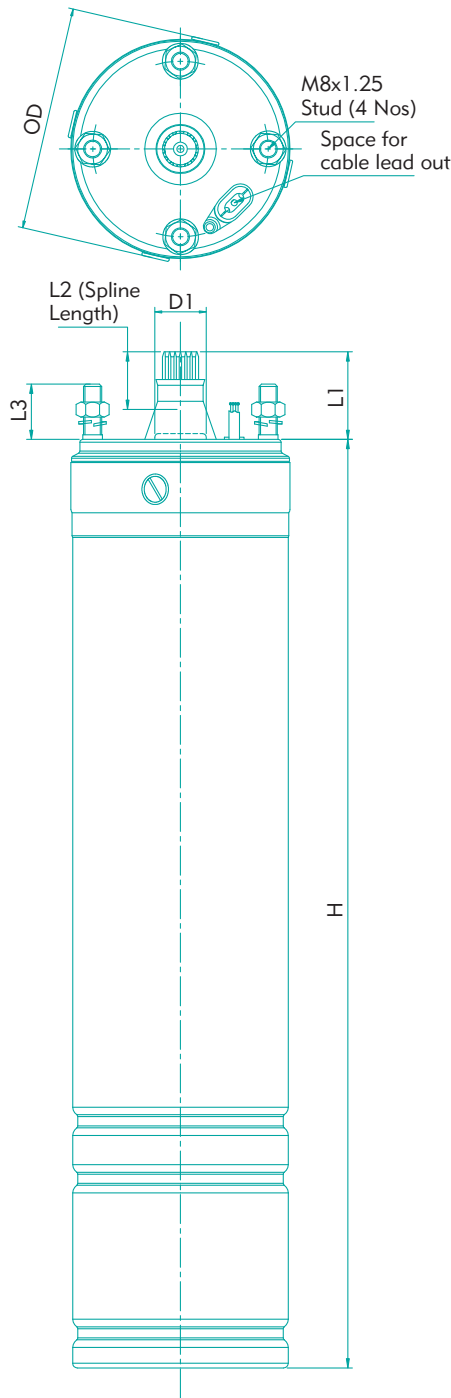

Dimensions are in Inches

	L1	L2	L3	D1	OD	PCD
4"	1.49	0.5	0.96	0.87	3.83	3

The company reserves the right to modify the technical specifications & illustrations without prior notice.

ELEGANT SERIES > 50Hz

Construction Features

Components	Version - TA
Seal Housing	Cast Iron with SS 304 Shell
Upper & Lower Support	Cast Iron
Shaft Seal	Carbon Vs Ceramic
Wounded Stator Shell	SS 304
Spline Shaft	SS 420
Rotor Shaft	SS 420 / EN-8D
Pressure Equalizing Diaphragm	High Nitrile Rubber
Diaphragm Bottom Plate	SS 304

Technical Data

Specifications	Nominal Diameter (4")
Rated Output & Voltage	0.37kW to 1.5 kW - 1Ph, 230V, 0.37kW to 7.5kW - 3 Ph, 380V
Rated Speed	2900 rpm
Voltage Tolerance	+6%
Protection	IP 68
Rotation Sequence	1 Ph - CCW, 3Ph - Electrically reversible
Outer Diameter	96mm
Duty	S1 (Continuous)
Linear flow	0.15m/sec
Liquid Temperature	38°C
Switching frequency	30 starts / hour
Thrust Load	0.37kW to 0.75kW - 1500N 1.1kW to 4kW - 2500N 5.5kW to 7.5kW - 4500N
Mounting Dimensions	NEMA standard
Starting Method	1 Ph - CSR / CSCR, 3 Ph - DOL
Motor Lead Out Type	Removable type - 4 core
Class of Insulation	" F "

Capacitor Details for 4" Single Phase 230V Submersible Motors (CSCR)

kW	Motor Type	Running Capacitor (μfd)	Starting Capacitor (μfd)
0.37	N4 - 03 TA-SE	36	60 / 80
0.55	N4 - 05 TA-SE	40	80 / 100
0.75	N4 - 07 TA-SE	45	100 / 120
1.1	N4 - 11 TA-SE	30 + 36	120 / 150
1.5	N4 - 15 TA-SE	60	200 / 250



ELECTRICAL DATA

ELEGANT SERIES > 50Hz

4", Single phase, 230V, Non-Toxic Liquid filled Submersible Motors

Motor Type	kW	HP	Current (A)	Locked Rotor Amps	Full Load		Thrust Capacity (N)	Torque (Nm)	CSR Capacitor (μfd)
					Eff%	Phase Angle			
N4-03 TA-SE	0.37	0.5	3.6	10.4	53	0.88	1500	0.6	15
N4-05 TA-SE	0.55	0.75	4.8	13.6	58	0.89	1500	0.9	20
N4-07 TA-SE	0.75	1	6.3	17.6	60	0.90	1500	1.2	30
N4-11 TA-SE	1.1	1.5	8.6	21.1	64	0.90	2500	1.8	40
N4-15 TA-SE	1.5	2	10	26.4	70	0.94	2500	2.5	50
N4-22 TA-SE	2.2	3	14	39.9	74	0.96	2500	3.6	60

4", Three phase, 380V, Non-Toxic Liquid filled Submersible Motors

Motor Type	kW	HP	Current (A)	Locked Rotor Amps	Full Load		Thrust Capacity (N)	Torque (Nm)
					Eff%	Phase Angle		
N4-03 TA-TJ	0.37	0.5	1.07	5.2	63	0.80	1500	2.2
N4-05 TA-TJ	0.5	0.75	1.9	9.3	63	0.80	1500	2.2
N4-07 TA-TJ	0.75	1	2.4	11.1	64	0.81	1500	3.0
N4-11 TA-TJ	1.1	1.5	3.15	13.0	68	0.82	2500	4.3
N4-15 TA-TJ	1.5	2	4.2	19.5	72	0.82	2500	5.9
N4-22 TA-TJ	2.2	3	6	28	72	0.83	2500	8.7
N4-30 TA-TJ	3.0	4	7.8	40.2	75	0.83	2500	11.9
N4-37 TA-TJ	3.7	5	9.6	48	75	0.83	2500	11.9
N4-40 TA-TJ	4.0	5.5	10	51	77	0.83	2500	15.8
N4-55 TA-TJ	5.5	7.5	13.6	71.1	78	0.85	4500	21.7
N4-75 TA-TJ	7.5	10	17.6	87.8	79	0.85	4500	29.6

The company reserves the right to modify the technical specifications & illustrations without prior notice.

DIMENSIONS & WEIGHTS

ELEGANT SERIES > 50Hz

4", Single phase, 230V, Non-Toxic Liquid filled Submersible Motors

Motor Type	kW	HP	Diameter (OD) in Inches	Height in Inches	Net Weight in lbs	Standard Motor Leads	
						mm ²	Length (m)
N4-03 TA-SE	0.37	0.5	3.83	15	16	4 x 1.5	1.5
N4-05 TA-SE	0.55	0.75	3.83	15	18	4 x 1.5	1.5
N4-07 TA-SE	0.75	1	3.83	17	21	4 x 1.5	1.5
N4-11 TA-SE	1.1	1.5	3.83	17	23	4 x 1.5	1.5
N4-15 TA-SE	1.5	2	3.83	18	25	4 x 1.5	1.5
N4-22 TA-SE	2.2	3	3.83	20	26	4 x 1.5	1.5

4", Three phase, 380V, Non-Toxic Liquid filled Submersible Motors

Motor Type	kW	HP	Diameter (OD) in Inches	Head in Inches	Net Weight in lbs	Standard Motor Leads	
						mm ²	Length (m)
N4-0.37 TA-TJ	0.37	0.5	3.83	15	16	4 x 1.5	1.5
N4-0.55 TA-TJ	0.55	0.75	3.83	15	18	4 x 1.5	1.5
N4-0.75 TA-TJ	0.75	1	3.83	17	21	4 x 1.5	1.5
N4-11 TA-TJ	1.1	1.5	3.83	17	23	4 x 1.5	1.5
N4-15 TA-TJ	1.5	2	3.83	18	25	4 x 1.5	1.5
N4-22 TA-TJ	2.2	3	3.83	19	27	4 x 1.5 / 2.5	2
N4-30 TA-TJ	3	4	3.83	22	43	4 x 2.5	2
N4-37 TA-TJ	3.7	5	3.83	24	43	4 x 2.5	2.5
N4-40 TA-TJ	4	5.5	3.83	28	52	4 x 2.5	2.5
N4-55 TA-TJ	5.5	7.5	3.83	33	66	4 x 2.5	3
N4-75 TA-TJ	7.5	10	3.83	37	74	4 x 2.5	3

CABLE SELECTION CHART

For Single Phase 3 wire (D.O.L.) Motor Maximum Length of Copper Cable

Motor Rating			CABLE SIZE IN SQUARE MILLIMETRES											
VOLTS	kW	HP	1.5	2.5	4	6	10	16	25	35	50	70	95	
230 VOLT 50Hz	0.37	0.5	120	200	320	480	810	1260	1900	2590	3580	4770	5920	MAXIMUM LENGTH IN METRES
	0.55	0.75	80	1030	220	320	550	850	1290	1760	2430	3230	4000	
	0.75	1.0	60	100	170	250	430	670	1010	1380	1910	2550	3460	
	1.1	1.5	40	70	120	180	300	470	710	980	1360	1850	2320	
	1.5	2.0	30	60	90	130	230	360	550	760	1060	1440	1820	
	2.2	3.0		40	60	90	150	230	350	490	680	920	1160	

For Three Phase 3 wire (D.O.L.) Motor Maximum Length of Copper Cable

Motor Rating			CABLE SIZE IN SQUARE MILLIMETRES																			
VOLTS	kW	HP	1.5	2.5	4	6	10	16	25	35	50	70	95	120	150	185	240	300	400	500	630	
380 - 415 VOLT 50Hz	0.37	0.5	473	788	1260																	
	0.55	0.75	398	660	1050																	
	0.75	1	311	518	825																	
	1.1	1.5	203	338	533	795																
	1.5	2	161	270	428	638																
	2.2	3	113	188	300	450	731															
	3	4	86	143	233	345	566	885														
	3.7	5	71	120	188	285	465	735														
	4	5.5	67	113	176	263	435	683	1043													
	4.5	6	64	105	169	255	420	653	998	1358												
	5.5	7.5	53	83	135	203	330	518	795	1088												
	7.5	10	38	60	98	150	233	375	563	773												
	9.3	12.5		53	83	128	210	330	503	683	938											
	11	15		45	75	105	173	278	413	563	795	1058										
	13	17.5			60	83	150	233	353	488	668	885										
	15	20			53	75	128	203	308	428	593	788	1005									
	18.5	25				60	105	158	248	338	461	615	788	938								
	22	30					90	135	210	285	398	533	675	810	953							
	26	35					75	113	173	233	330	458	578	705	825	953						
	30	40					68	98	158	210	300	390	503	585	698	803	938					
	37	50						83	128	173	240	315	405	480	563	645	758	863				
	45	60							105	143	195	270	345	420	503	585	698	795				
	55	75								120	165	218	285	353	413	480	570	656				
	63	85								109	150	173	255	315	368	428	503	578				
	75	100									120	165	218	263	308	353	420	480	563			
	93	125										135	173	210	248	285	338	383	450			
	110	150											150	180	218	248	300	345	405	454		
	130	175											128	154	188	218	255	300	345	398	439	
	150	200												135	161	188	225	263	311	349	386	
	166	225													135	165	195	225	263	300	334	
185	250														150	180	210	248	278	311		
220	300															143	165	191	215	237		
260	350																143	165	188	206		
300	400																	124	143	158	180	


The given cable lengths are the maximum one from POWER TO MOTOR, Exceeding the lengths mentioned will void warranty.

CABLE SELECTION CHART

For Three Phase 6 wire (S.D.) Motor Maximum Length of Copper Cable

Motor Rating			CABLE SIZE IN SQUARE MILLIMETRES																			
VOLTS	kW	HP	1.5	2.5	4	6	10	16	25	35	50	70	95	120	150	185	240	300	400	500	630	
380 - 415 VOLT 50Hz	5.5	7.5	91	143	234	351	572	896	1377	1884												
	7.5	10	65	104	169	260	403	650	974	1338												
	9.3	12.5		91	143	221	364	572	870	1182	1624											
	11	15		78	130	182	299	481	714	974	1377	1832										
	13	17.5			104	143	260	403	611	844	1156	1533										
	15	20			91	130	221	351	533	740	1026	1364	1741									
	18.5	25				104	182	273	429	585	799	1065	1364	1624								
	22	30					156	234	364	494	688	922	1169	1403	1650							
	26	35					130	195	299	403	572	792	1000	1221	1429	1650						
	30	40					117	169	273	364	520	675	870	1013	1208	1390	1624					
	37	50						143	221	299	416	546	701	831	974	1117	1312	1494				
	45	60							182	247	338	468	598	727	870	1013	1208	1377				
	55	75								208	286	377	494	611	714	831	987	1137				
	63	85								188	260	299	442	546	637	740	870	1000				
	75	100									208	286	377	455	533	611	727	831	974			
	93	125										234	299	364	429	494	585	662	779			
	110	150											260	312	377	429	520	598	701	786		
	130	175												221	266	325	377	442	520	598	688	760
	150	200													234	279	325	390	455	539	604	669
	166	225														234	286	338	390	455	520	578
	185	250															260	312	364	429	481	539
	220	300																247	286	331	372	410
	260	350																	247	286	325	357
	300	400																		214	247	273

The given cable lengths are the maximum one from POWER TO MOTOR, Exceeding the lengths mentioned will void warranty.

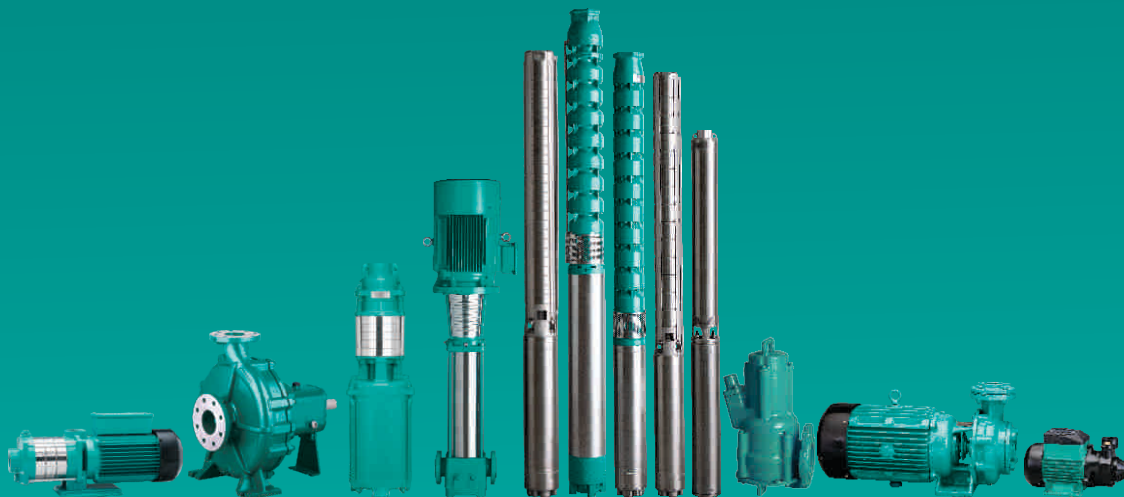

T H E P O W E R B E H I N D T H E F O R C E

Naargo Industries Private Limited, one of the leading manufacturers of latest state of art, large range of pumps and motors, is managed by veterans who are in the pump industry for almost half a century. The products are employed in various applications like irrigation, domestic, civil construction, de-watering etc; The Company has a strong distribution network in India for sales & service and a strong global presence.

Quality is the key factor in Naargo's products. The expansive infrastructure and environment accredited with ISO 9001 quality certification, latest engineering softwares, high-tech machinery, futuristic pumping technology and high caliber workforce facilitate the production of flawless and efficient products on par with international standards under the brand name of "Tormac". The well equipped R & D wing stays alive to the changing global trends and comes out with viable solutions for innovative product development and upgradation.

The Products currently available include Stainless Steel Submersible Pumps, 4" Thermoplastic Submersible Pumps, 6" & 8" Cast Iron Submersible Pumps, Submersible Motors and Controls, Centrifugal Pumps, Inline Booster Pumps, Jet Self-priming Pumps and Peripheral Pumps.

The power, performance and endurance of the products backed by the uncompromising teamwork and value systems will certainly propel the company's growth towards new horizons in the pump industry.

Naargo Industries Private Limited,

No. 2, Gem Garden, Athipalayam Junction, Ganapathy, Coimbatore - 641 006, INDIA.

Tel : +91 978 6522622, Fax : +91 422 2531956

email : tormac@tormacpumps.com web : www.tormacpumps.com

Tormac
P U M P S